

BoldVu® Outdoor Digital LCD Displays provide full 3500 nit brightness without any degradation / loss of brightness or visual performance for over 10 years...**twice** the industry standard.

BoldVu® UMDs are designed to be mounted directly onto a wall (single sided only), from overhead, or from underneath for maximum flexibility. Wall mount designs are provided with mounting brackets. Other designs are customized to match existing or new mounting patterns.



**Direct Sun
Viewable**



**IP66 / IK10
Protected**



**Easy to
Install**



**Real-time
Monitoring**

All BoldVu® UMDs are shipped complete; easily mounted onto a wall, column or structure.

BoldVu® Display Products are suited for operation in direct sunlight under ambient temperatures up to 50° C / 122° F with the patented and proven CoolVu® Thermal Management System, unique only to the BoldVu® product line.

With an installed base of over 25,000 units, BoldVu® UMDs are a solid investment for customers seeking a proven, reliable Outdoor Digital LCD Display platform.



BoldVu® LT
Semi-Outdoor
850 Nits



BoldVu®
Outdoor
3500 Nits

Most Common



BoldVu® XT
Extreme Outdoor
5000 Nits

Display Configurations

Single-Sided

One digital display face.

Double-Sided

Two digital display faces back to back.

Single-Sided with Static LED Backlight

One digital face and an LED backlit face for a static poster.

Optional Features

Digital InfiniteTouch®

All-Glass PCAP touchscreen with digital controller.

Cameras

USB or IP cameras hidden behind the display cover glass.

Comms Cap

Connectivity Gateways, Telecom devices, etc



Installations of standard BoldVu® UMD products



Standard Features

Standard features have been developed based on customer feedback, allowing for long-term operation with the lowest cost for deployment and operation.

Feature

Benefit

Optical Design

BrightVu® - 3500 Nit Brightness	Maintains full brightness for 10 years, providing best ROI in the industry
BestVu® - Image Optimization	Provides superior viewing in all ambient lighting conditions
LifeVu® - Future-Proofing	Designed to provide over 10 years of usable life with no costly upgrades
PolrVu® - Polarized Sunglass Visibility*	Advertisements are always seen by all people in the area

Operational Enhancement

DynamicVu® - LED Block Dimming	Provides true colors / tones and greatly reduces power consumption
GeoVu® - Brightness Control	Adjusts brightness based on seasonal solar patterns and current weather
AmpVu®, VoltVu®, WattVu®, PowerVu® - Energy Monitoring	Prevents false breaker trips, improves uptime, power consumption data
QuietVu™ - Noise Reduction	Super-quiet design eliminates noise complaints

Mechanical Design

CoolVu® - Thermal Management	Handles all temperature extremes, even in direct sunlight
ToughVu® - Cover Glass	Provides low reflection, wide viewing angles, and vandal resistance
ReadyVu™ - Integration Ready	No on-site programming required, all software / IP configs at factory

Remote Management

SmartVu® - Monitoring Entire Population	Cloud based asset management that "phones home" if problems arise
StatusVu® - Data & Diagnostics	Provides extensive self-monitoring of individual assets
AlertVu™ - Proactive Alerting System	Automatic alert e-mailed to customer of onsite problem, such as door open
SureVu® - Video Monitoring	Is your content running and on display? With SureVu® you can be sure
LockVu™ - Sealed Unit Confirmation	Ensures all doors are firmly latched and sealed
ShockVu® - Impact Detection	Allows remote detection of abnormal impacts or vandalism
RemoteVu® - Remote Recovery	Provides for remote monitoring and auto reboot as needed
HumidityVu® - Dew Point Detection System	Detection and automatic mitigation of potential internal condensation
SealVu® - Monitoring Internal Air Pressure	To ensure maintenance of IP66 sealing - No water/dust
PopVu® - Proof of Play System	Ability to remotely view Ads / Content currently playing on the display



**556 US & Overseas
Patents**




**34 Registered
and Pending Trademarks**



**26,526 Installed Faces
and Counting**

*PolrVu not available on 98" screens

Display Sizes

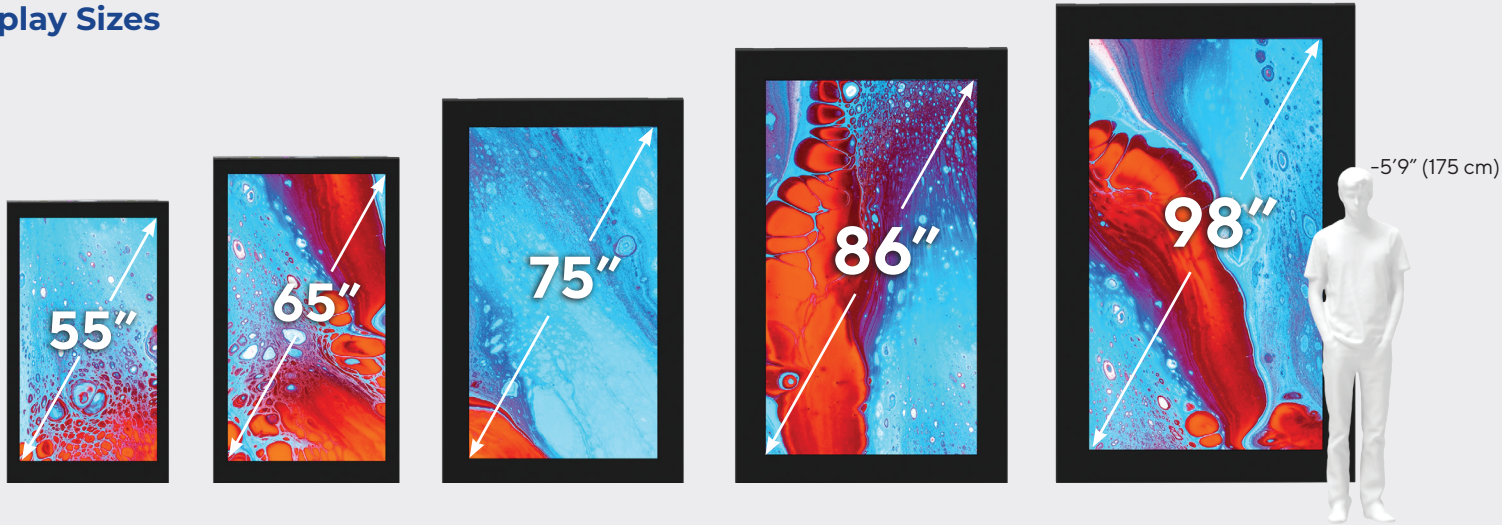

Technical Specifications

Input Power	120-240VAC 50-60Hz (dependent on size)
Min. Ambient Operating Temperature	-40°C (-40°F)
Max. Ambient Operating Temperature	50°C (122°F)
Daytime Luminance	3500 nits
Standard Media Player	NUC with 11th generation Intel® Core® i5 Processor, 8GB DDR4 RAM, and 256GB SSD

Single-Sided UMD

Display Size (diagonal)	55" Slim	65"	75"	86"	98"
Active Display Area	26.79" W x 47.62" H	31.6" W x 56.2" H	36.5" W x 66.0" H	41.97" W x 74.61" H	47.8" W x 85.0" H
Resolution	1080 x 1920	2160 x 3840	2160 x 3840	2160 x 3840	2160 x 3840
Avg. Power Consumption	250 W	425 W	480 W	950 W	1210 W
Width (Typical)	31.5" (80 cm)	37.5" (95 cm)	45.7" (116 cm)	50.8" (129 cm)	54" (137 cm)
Height (Typical)	56.3" (143 cm)	64.7" (164 cm)	74.4" (189 cm)	82.7" (210 cm)	93.0" (236 cm)
Depth (Typical)	3.9" (10 cm)	5.8" (15 cm)	5.8" (15 cm)	5.8" (15 cm)	5.8" (15 cm)
Weight (Approximate)	175 lbs (80 kg)	375 lbs (170 kg)	450 lbs (204 kg)	550 lbs (250 kg)	620 lbs (280 kg)

Double-Sided UMD

Display Size (diagonal)	55"	65"	75"	86"	98"
Active Display Area	26.79" W x 47.62" H	31.6" W x 56.2" H	36.5" W x 66.0" H	41.97" W x 74.61" H	47.8" W x 85.0" H
Resolution	1080 x 1920	2160 x 3840	2160 x 3840	2160 x 3840	2160 x 3840
Avg. Power Consumption	450 W	675 W	760 W	1660 W	2180 W
Width (Typical)	31.5" (80 cm)	37.5" (95 cm)	45.7" (116 cm)	50.8" (129 cm)	54" (137 cm)
Height (Typical)	56.3" (143 cm)	64.7" (164 cm)	74.4" (189 cm)	82.7" (210 cm)	93.0" (236 cm)
Depth (Typical)	10.9" (28 cm)	10" (25 cm)	10" (25 cm)	10" (25 cm)	10" (25 cm)
Weight (Approximate)	320 lbs (145 kg)	600 lbs (270 kg)	750 (340 kg)	900 (408 kg)	1020 lbs (463 kg)

Note: Generation 17 Data. Specifications and dimensions subject to change without notice.
Power use based on full brightness of 3500 nits with a white field, averaged over 10 years of 24/7 use.

BoldVu® is a registered trademark of Manufacturing Resources International, Inc. (MRI).
BoldVu® is also used under license by LG-MRI LLC, a joint venture entity between LG Electronics U.S.A., Inc., and MRI; and, by Precision Systems Integration, LLC, affiliated with MRI.

The information provided in this material is for general informational purposes only. All information is provided in good faith, however, Manufacturing Resources International, Inc. and its affiliates make no representation or warranty of any kind, express or implied, regarding the accuracy, adequacy, validity, reliability, availability or completeness of any information appearing in this material. All information is subject to change or updates without notice.