

Sureview 32" High Brightness Outdoor LCD Monitor



Sureview Professional LCD Monitors are designed to captivate your customers' attention. With high resolution and performance, they cater to the diverse needs of commercial users. Sureview offers a broad range of screen sizes from 10" to 98", suitable for 24/7 applications. These eco-friendly LED-backlit displays consume 30% less power than traditional CCFL-backlit models, extending the lifespan of the LCD screens. Each monitor includes VGA, DVI, and HDMI inputs, ensuring compatibility with any media player box, PC, or video device.

Key Features:

- 32 Inch LED IP65 Outdoor Monitor
- 1920x1080 Resolution
- 89/89/89/89 Viewing Angle
- DP/VGA/HDMI inputs
- 7-24 Hours Operation
- Standard 300x300mm Vesa Holes
- 2 High Quality Speakers
- Capacitive Touch Options

Application Areas


- Hospitals
- Retail Stores
- Shopping Malls
- Supermarkets
- Museums And Galleries
- Airports
- Train/bus Stations
- Toll


SUREMIEW



Sureview 32" High Brightness Outdoor LCD Monitor

SVRCS-3200DCM

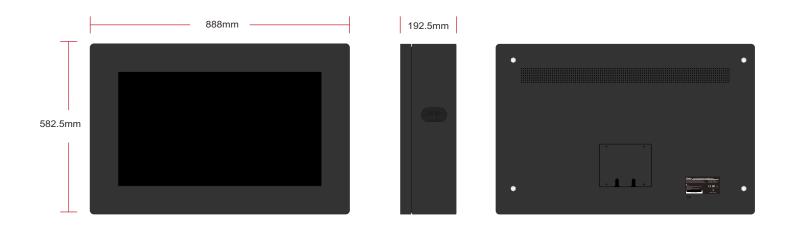



Specifications

DISPLAY	Panel Model Max Resolution Aspect Ratio Pixel Pitch Viewing Angle Contrast Ratio Brightness Response Time Display Area (mm) Panel Size(mm) Screen Weight Lamp Type	32inch TFT LED 1920x1080 16:09 0.36375x0.36375 89/89/89 1400:1 3500cd/m ² 6.5ms 698.4x392.85mm 727.4x429x227mm 4.8Kg WLED	COOLING SYSTEM
			LEVEL OF PROTECTI
			ON-SCREEN DISPLAY L
INTERFACE		1*DP input	TOUCH
		1*HDMI input 1*VGA input	POWER
		1*Type-C input (optional) 1*Audio input	SOUND
	VGA HDMI Switch	1*Earphine output 1*AC input Up to 1920x1080@60Hz 480i, 480p, 720i, 720p, 1080i, 1080p 480i, 480p, 720i, 720p, 1080i, 1080p Power on/off	DIMENSION & WEIGHT
MECHANICAL	Cabinet Material Finish Mount	Metal Matte silver Wall mounting compatible with standard bracket	OTHER
PERATURE CONTROLLER		TemCooling fan can be set to start running when the whole temperature reached 60 °C	ACCESSORIES
SPD		Lightning protection device	
LEAKAGE PROTECTION SWITCH		110~220V*1	

COOLING SYSTEM	Blowing machine Cooling fan Noise DB (A)	Air cooling system: 45 blowing machines and 15 cooling fans, stable and reliable performance <55dB	
LEVEL OF PROTECTIO	N	IP65	
ON-SCREEN DISPLAY LA	NGUAGES	English, French, German, Italian, Polish, Russian, Simplified Chinese, Spanish, Turkish, Arabic, Japanese, Traditional Chinese etc.	
DISPLAY MODE		Portrait & Landscape	
ТОИСН		Capacitive Touch options	
POWER	Mains Power Consumption	AC 100-240V, 50-60 Hz 127W	
SOUND	Built-in Speakers	2 x 10W	
DIMENSION & WEIGHT	Machine Size Machine Weight Carton Size Carton Weight Wooden Case Size Wooden Case Weight	888x192.5x582.5mm 96.3KG 1040x500x750mm 105KG 1070x530x780mm(1PCS) 115KG	
OTHER	Regulatory Approvals Warranty	CE, FCC, ROHS, HDMI certificates 2 years warranty	
ACCESSORIES	Remote Control Power Supply User's Manual	Optional x1 AC cable x1	