

## SVRCS - 430ODLM



Assured Digital Signage offers professional-grade LCD monitors designed to captivate your audience. These high-resolution, high-performance displays are tailored to meet the diverse needs of commercial users.

Our monitors are available in a wide range of screen sizes, from 10" to 84", and are engineered for 24/7 operation. Featuring eco-friendly LED backlighting, these commercial displays consume 30% less power than CCFL-backlit models, extending the lifespan of the LCD screen.


Equipped with versatile VGA, DVI, and HDMI inputs, our monitors are compatible with a variety of media players, PCs, and video devices, ensuring seamless integration into any setup.

## Key Features:

- 43 inch LCD Monitor
- 1920x1080 resolution
- 89/89/89/89 viewing angle
- VGA/HDMI inputs
- 7-24 hours operation
- 2 High Quality Speakers
- Camera Optional



## SVRCS - 430ODLM

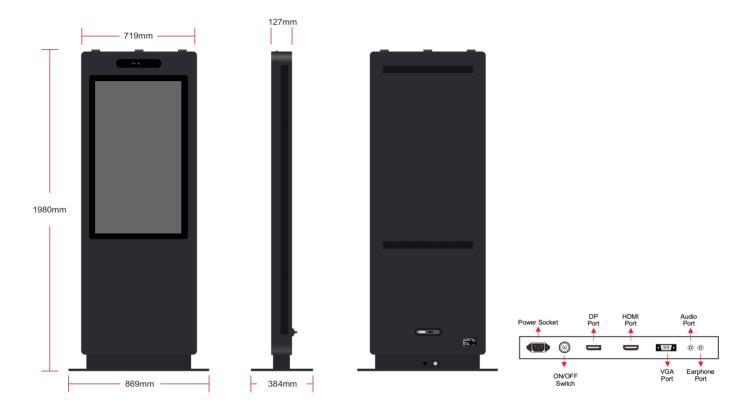

## **Specifications**

DISPLAY	Max Resolution 1920x10 Aspect Ratio 16:09 Pixel Pitch 0.4903×	43inch TFT LED	LEVEL OF PROTECTION ON-SCREEN DISPLAY LANGUAGES		IP65
		16:09 0.4903×0.4903 89/89/89/89			English, French, German, Italian, Polish, Russian, Simplified Chinese, Spanish, Turkish, Arabic, Japanese, Traditional Chinese etc.
	Brightness Response Time		DISPLAY MODE		Portrait & Landscape
	Display Area (mm) Panel Size(mm) Screen Weight Lamp Type		POWER	Mains Power Consumption	AC 100-240V, 50-60 Hz 240W
			SOUND	Built-in Speakers	2 x 10W
INTERFACE	VGA HDMI	1*DP input 1*HDMI input 1*VGA input 1*Type-C input (optional) 1*Audio input 1*Earphine output 1*AC input Up to 1920x1080@60Hz 480i, 480p, 720i, 720p, 1080i, 1080p 480i, 480p, 720i, 720p, 1080i, 1080p	DIMENSION & WEIGHT	Machine Size  Machine Weight Carton Size Carton Weight Wooden Case Size Wooden Case Weight	1980x127x719mm 869X10X384mm(stand base) 147KG 2095x255x855mm 157KG 2130x330x995mm(1PCS) 180KG
			OTHER	Regulatory Approvals Warranty	CE, FCC, ROHS, HDMI certificates 2 years warranty
MECHANICAL	Switch  Cabinet Material  Finish  Mount	Power on/off  Metal  Matte silver  Wall mounting compatible with standard bracket	ACCESSORIES	Remote Control Power Supply User's Manual	Optional x1 AC cable x1
SPD		Lightning protection device			
LEAKAGE PROTECTION SWITCH		110~220V*1			