



Digital Signage involves the remote-controlled distribution and playback of digital content—such as TV programs, advertisements, menus, and various types of information—across display networks. These displays can vary from large digital billboards to smaller screens, positioned either in a single location or across multiple sites. The goal is to engage the audience with pertinent information. Digital signage allows for dynamic and targeted message delivery.

Sureview has showcased a Digital Signage application on the Android platform. This app offers features such as updating content via a remote web browser and supports playback of video content, images, HTML web pages, and scrolling text messages.

**Key Features:**



- Android 9.0 operating system
- Rk3399, Dual-core Cortex-A72, 1.8GHz
- 2/4GB DDR3 + 8/16 GB Flash
- 802.11a/b/g/n/ac internal Wifi
- 4G/WIFI/WLAN Network connection
- Remote Management Software
- Portrait display mode
- 1080P Display output

**Designed for:**

- POS
- Hotel
- Self-service Terminal
- Public Information Display
- Hospitality
- In-vehicles And Transportation

# 65" High Brightness Outdoor Android LCD Monitor

SVRCS-650DCAZ

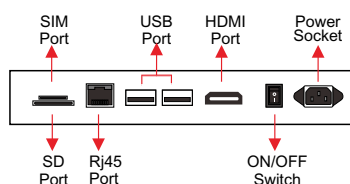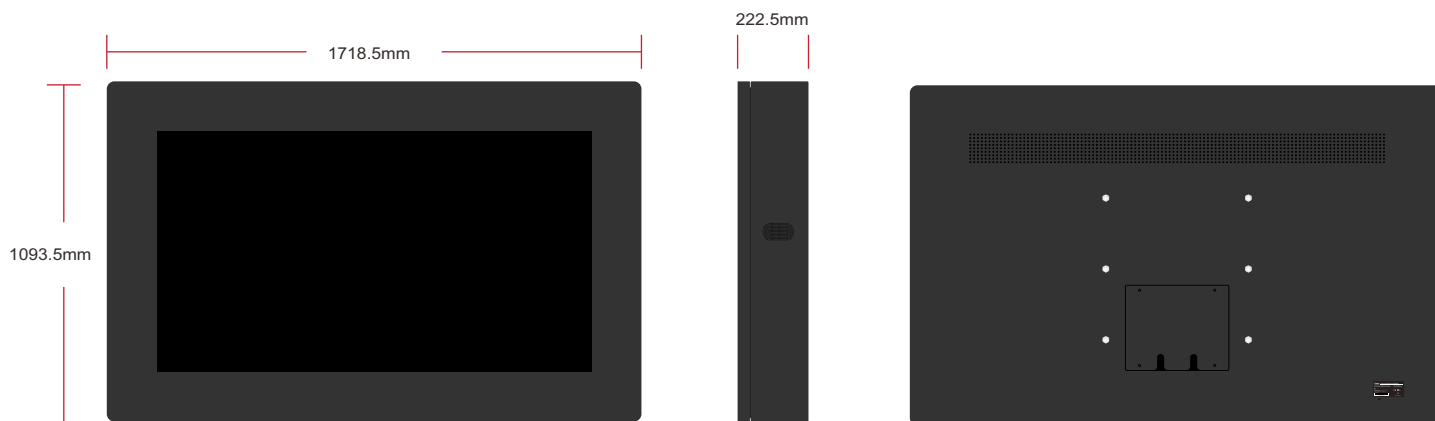

## Specifications

PANEL	Panel Model	65 inch TFT LED	HDMI DISPLAY	Output Mode	HDMI 480P	HDMI 576P
	Max Resolution	3840x2160			HDMI 720P 50Hz	HDMI 720P 60Hz
	Aspect Ratio	16:09			HDMI 1080I 50Hz	HDMI 1080I 60Hz
	Pixel Pitch	0.372x0.372			HDMI 1080P 24Hz	HDMI 1080P 50Hz
	Viewing Angle	89/89/89/89			HDMI 1080P 60Hz	
	Contrast Ratio	1400:1				
	Brightness	4000cd/m <sup>2</sup>				
	Response Time	13ms				
	Display Area (mm)	1428.48x803.52				
	Panel Size(mm)	1459.2x830x16				
Screen Weight	28Kg					
Lamp Type	WLED					
INTERNAL MEDIA PLAYER	CPU	Rk3399, Dual-core Cortex-A72, 1.8GHz	PERATURE CONTROLLER	TemCooling fan can be set to start running when the whole temperature reached 60 °C		
	GPU	ARM Mali-T864				
	RAM	2/4 GB DDR3		SPD	Lightning protection device	
	ROM	8/16 GB Flash		LEAKAGE PROTECTION SWITCH	110~220V*1	
	OS	Android 9.0		COOLING SYSTEM	Blowing machine	Air cooling system: 45 blowing machines and 15 cooling fans, stable and reliable performance
			Cooling fan	Noise DB (A) <55dB		
CONNECTOR	USB 2.0	X2	LEVEL OF PROTECTION	IP65		
	HDMI (Output)	X1	ON-SCREEN DISPLAY LANGUAGES	English, French, German, Italian, Polish, Russian, Simplified Chinese, Spanish, Turkish, Arabic, Japanese, Traditional Chinese etc.		
	SD	X1	POWER	Mains Power	AC 100-240V, 50-60 Hz	
	Rj45	X1	Consumption	620W		
4G SIM (Optional)	X1		SOUND	Built-in Speakers	2 x 10W	
CONNECTIVITY	LAN	RJ45 Port, 10/100M Ethernet	DIMENSION & WEIGHT	Machine Size	1718.5x222.5x1093.5mm	
	WiFi	Built-in WiFi 802.11a/b/g/n/ac	Machine Weight	198KG		
	4G (Optional)	LTE	Carton Size	1780x400x1100mm		
			Carton Weight	210KG		
FILE SUPPORT	Video	H.264, MKV, WMV9, MPEG 1/2/4, HD Divx, Xvid, RM/RMVB;	Wooden case Size	1810x430x1130mm(1PCS)		
	Image	BMP/PNG/GIF/JPEG	Wooden case Weight	230KG		
	Audio	MP3,WMA,WAV,EAAC+, MP2 dec, Vorbis (Ogg), AC3, FLAC, APE, BSAC				
	Scrolling Text	txt				
DISPLAY MODE	Portrait & Landscape		OTHER	Regulatory Approvals	CE, FCC, ROHS	
TOUCH	Capacitive touch options		Warranty	2 years warranty		
			ACCESSORIES	Included	Remote Control, Power supply, User manual, Keys, Screws	