



Digital Signage involves the remote-controlled distribution and playback of digital content—such as TV programs, advertisements, menus, and various types of information—across display networks. These displays can vary from large digital billboards to smaller screens, positioned either in a single location or across multiple sites. The goal is to engage the audience with pertinent information. Digital signage allows for dynamic and targeted message delivery.



Sureview has showcased a Digital Signage application on the Android platform. This app offers features such as updating content via a remote web browser and supports playback of video content, images, HTML web pages, and scrolling text messages.

Key Features:

- Android 9.0 operating system
- Rk3399, Dual-core Cortex-A72, 1.8GHz
- 2/4GB DDR3 + 8/16 GB Flash
- Anti-ultraviolet and heat insulation
- Intelligent wind control system
- High temperature protection system
- Low temperature protection
- Full waterproof system
- Air inlet and outlet dust-proof
- AG glass anti-reflecture film
- IP65 Enclosure
- Three Frames and three heat insulations
- Intelligent electric leakage protection
- Air conditioner for cooling and heating

Designed for:

- POS
- Hotel
- Self-service Terminal
- Public Information Display
- Hospitality
- In-vehicles And Transportation

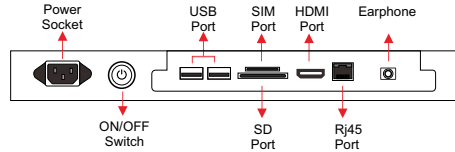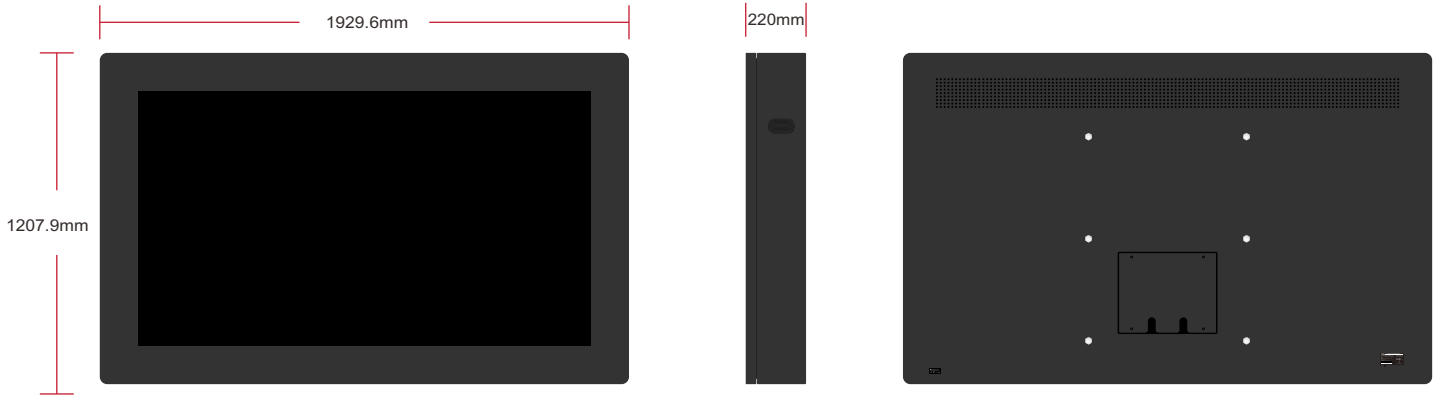

Specifications

PANEL	Panel Model	75inch TFT LED	HDMI DISPLAY	Output Mode	HDMI 480P	HDMI 576P		
	Max Resolution	3840x2160			HDMI 720P 50Hz	HDMI 720P 60Hz		
	Aspect Ratio	16:09			HDMI 1080I 50Hz	HDMI 1080I 60Hz		
	Pixel Pitch	0.4296x0.4296			HDMI 1080P 24Hz	HDMI 1080P 50Hz		
	Viewing Angle	89/89/89/89			HDMI 1080P 60Hz			
	Contrast Ratio	1200 : 1						
	Brightness	4000cd/m ²						
	Response Time	8ms						
	Display Area (mm)	1549.44x871.56mm						
	Panel Size(mm)	1758x993x45mm						
Screen Weight	35Kg							
Lamp Type	WLED							
INTERNAL MEDIA PLAYER	CPU	Rk3399, Dual-core Cortex-A72, 1.8GHz	PERATURE CONTROLLER	TemCooling fan can be set to start running when the whole temperature reached 60 °C				
	GPU	ARM Mali-T864		SPD	Lightning protection device			
	RAM	2/4 GB DDR3			LEAKAGE PROTECTION SWITCH	110~220V*1		
	ROM	8/16 GB Flash				COOLING SYSTEM	Blowing machine	Air cooling system: 45 blowing machines and 15 cooling fans, stable and reliable performance
	OS	Android 9.0					Cooling fan	Noise DB (A) <55dB
CONNECTOR	USB 2.0	X2	LEVEL OF PROTECTION				IP65	
	HDMI (Output)	X1		ON-SCREEN DISPLAY LANGUAGES			English, French, German, Italian, Polish, Russian, Simplified Chinese, Spanish, Turkish, Arabic, Japanese, Traditional Chinese etc.	
	SD	X1			POWER		Mains Power	AC 100-240V, 50-60 Hz
	Rj45	X1				Consumption	850W	
	4G SIM (Optional)	X1				SOUND	Built-in Speakers	2 x 10W
CONNECTIVITY	LAN	RJ45 Port, 10/100M Ethernet	DIMENSION & WEIGHT				Machine Size	1929.6x220x1207.9mm
	WiFi	Built-in WiFi 802.11a/b/g/n/ac		Machine Weight			188KG	
	4G (Optional)	LTE		Carton Size	2150x1330x500mm			
	FILE SUPPORT	Video		H.264, MKV, WMV9, MPEG 1/2/4, HD Divx, Xvid, RM/RMVB;	Carton Weight		228KG	
		Image		BMP/PNG/GIF/JPEG	Wooden case Size	2210x1390x560mm (1PCS)		
Audio		MP3,WMA,WAV,EAAC+, MP2 dec, Vorbis (Ogg), AC3, FLAC, APE, BSAC	Wooden case Weight	385KG				
Scrolling Text		txt	OTHER	Regulatory Approvals	CE, FCC, ROHS			
DISPLAY MODE		Portrait & Landscape		ACCESSORIES	Warranty	2 years warranty		
	TOUCH	Capacitive Touch options			Included	Remote Control, Power supply, User manual, Keys, Screws		