

SVRCS-860DCAZ



Digital Signage involves the remote-controlled distribution and playback of digital content—such as TV programs, advertisements, menus, and various types of information—across display networks. These displays can vary from large digital billboards to smaller screens, positioned either in a single location or across multiple sites. The goal is to engage the audience with pertinent information. Digital signage allows for dynamic and targeted message delivery.

Sureview has showcased a Digital Signage application on the Android platform. This app offers features such as updating content via a remote web browser and supports playback of video content, images, HTML web pages, and scrolling text messages.



Key Features:

- Android 9.0 operating system
- Rk3399, Dual-core Cortex-A72, 1.8GHz
- 2/4GB DDR3 + 8/16 GB Flash
- 802.11a/b/g/n/ac internal Wifi
- WIFI/WLAN Network connection
- 4G optional
- Remote Management Software optional
- Smart air control system for cooling and heating
- Sunlight readable and dustproof function
- IP65 waterproof function
- Light sensor

Designed for:

- POS
- Hotel
- Self-service Terminal
- Public Information Display
- Hospitality
- In-vehicles And Transportation

SVRCS-860DCAZ

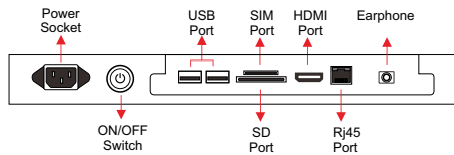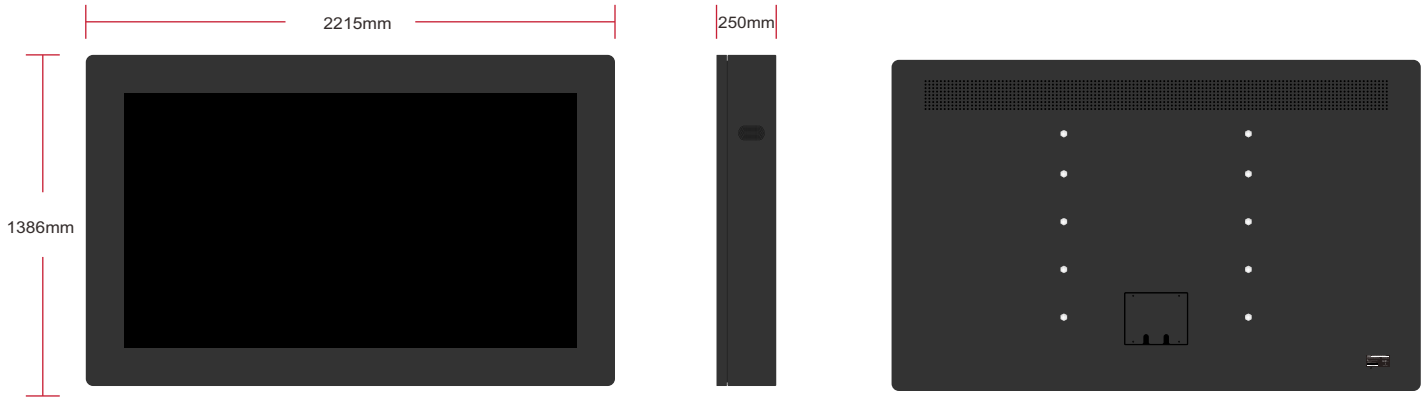

Specifications

PANEL	Panel Model	86inch TFT LCD	HDMI DISPLAY	Output Mode	HDMI 480P	HDMI 576P
	Max Resolution	3840x2160			HDMI 720P 50Hz	HDMI 720P 60Hz
	Aspect Ratio	16:09			HDMI 1080I 50Hz	HDMI 1080I 60Hz
	Pixel Pitch	0.4935x0.4935			HDMI 1080P 24Hz	HDMI 1080P 50Hz
	Viewing Angle	89/89/89/89			HDMI 1080P 60Hz	
	Contrast Ratio	1200:1				
	Brightness	4000cd/m ²				
	Response Time	8ms				
	Display Area (mm)	1895.04x1065.96mm				
	Panel Size(mm)	1922.2x1093.2x16.14mm				
Screen Weight	42Kg					
Lamp Type	WLED					
INTERNAL MEDIA PLAYER	CPU	Rk3399, Dual-core Cortex-A72, 1.8GHz	PERATURE CONTROLLER	TemCooling fan can be set to start running when the whole temperature reached 60 °C		
	GPU	ARM Mali-T864				
	RAM	2/4 GB DDR3		SPD	Lightning protection device	
	ROM	8/16 GB Flash		LEAKAGE PROTECTION SWITCH	110~220V*1	
	OS	Android 9.0		COOLING SYSTEM	Blowing machine	Air cooling system: 45 blowing machines and 15 cooling fans, stable and reliable performance
CONNECTOR	USB 2.0	X2	Cooling fan	Noise DB (A) <55dB		
	HDMI (Output)	X1	LEVEL OF PROTECTION	IP65		
	SD	X1	ON-SCREEN DISPLAY LANGUAGES	English, French, German, Italian, Polish, Russian, Simplified Chinese, Spanish, Turkish, Arabic, Japanese, Traditional Chinese etc.		
	Rj45	X1	POWER	Mains Power Consumption	AC 100-240V, 50-60 Hz 1100W	
	4G SIM (Optional)	X1	SOUND	Built-in Speakers	2 x 10W	
CONNECTIVITY	LAN	RJ45 Port, 10/100M Ethernet	DIMENSION & WEIGHT	Machine Size	2215X250X1386mm	
	WiFi	Built-in WiFi 802.11a/b/g/n/ac		Machine Weight	155KG / 21KG(stand base)	
	4G (Optional)	LTE		Carton Size	2400x320x1500mm	
				Carton Weight	180KG	
FILE SUPPORT	Video	H.264, MKV, WMV9, MPEG 1/2/4, HD Divx, Xvid, RM/RMVB;	Wooden case Size	2500x380x1580mm(1PCS)		
	Image	BMP/PNG/GIF/JPEG	Wooden case Weight	208KG		
	Audio	MP3,WMA,WAV,EAAC+, MP2 dec, Vorbis (Ogg), AC3, FLAC, APE, BSAC				
	Scrolling Text	txt	OTHER	Regulatory Approvals	CE, FCC, ROHS	
DISPLAY MODE		Landscape	Warranty	1 year warranty		
TOUCH		Capacitive touch options	ACCESSORIES	Included	Remote Control, Power supply, User manual, Keys, Screws	