



Digital Signage involves the remote-controlled distribution and playback of digital content such as TV programs, advertisements, menus, and various forms of information - on networks displays. These displays can range from large digital billboards to smaller screens, either at a single location or across multiple sites. The goal is to target the audience with relevant information.

Assured Digital Signage has showcased a Digital Signage application on the Android platform. This application features the ability to update content remotely via a web browser, and supports the playback of video content, images, HTML web pages, and scrolling text messages.


Key Features:

- Android 9.0 operating system
- Rk3399, Dual-core Cortex-A72, 1.8GHz
- 2/4GB DDR3 + 8/16 GB Flash
- 802.11 b/g/n internal Wifi
- WIFI/WLAN Network connection
- 4G optional
- Remote Management Software optional
- Smart air control system for cooling and heating
- Sunlight readable and dustproof function
- IP65 waterproof function
- Light sensor

Designed for:

- POS
- Hotel
- Self-service Terminal
- Public Information Display
- Hospitality
- In-vehicles And Transportation

SVRCS - 860DLAZ

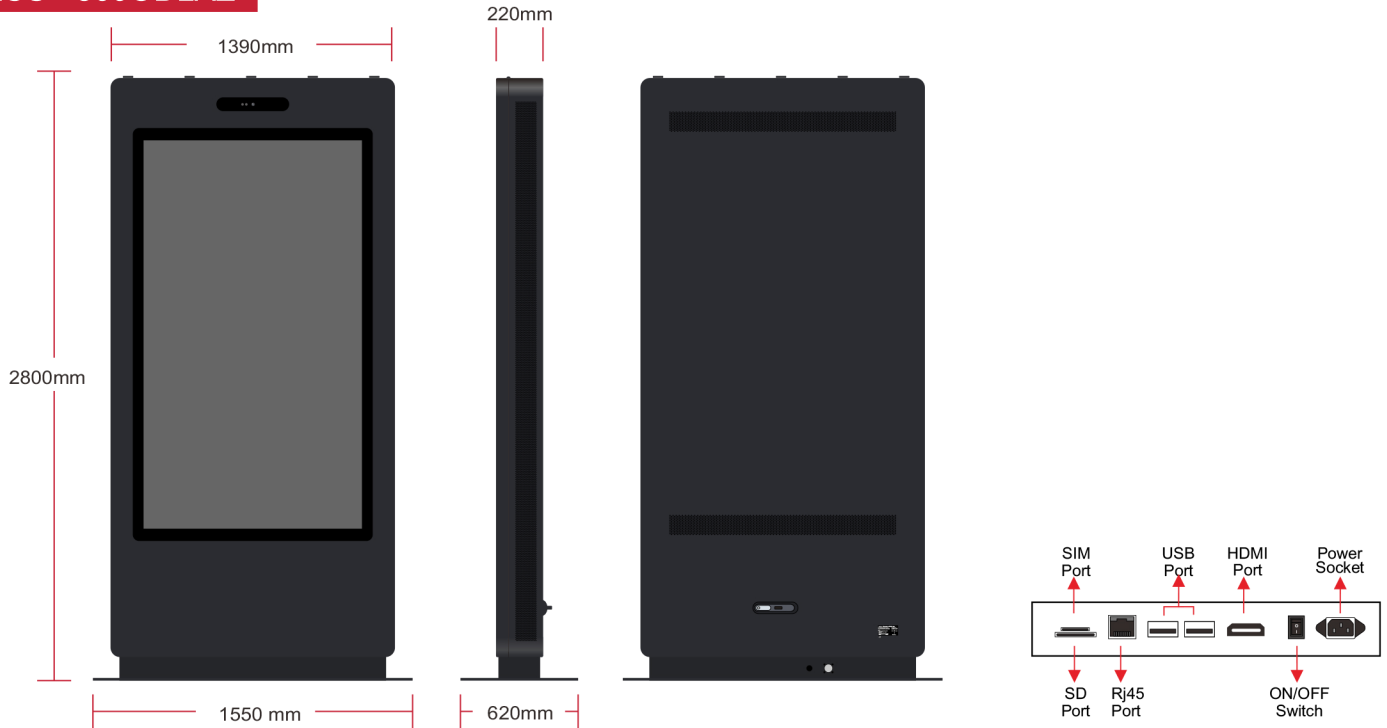

Specifications

PANEL	Panel Model	86inch TFT LCD
	Max Resolution	3840x2160
	Aspect Ratio	16:09
	Pixel Pitch	0.4935x0.4935
	Viewing Angle	89/89/89/89
	Contrast Ratio	1200:1
	Brightness	4000cd/m ²
	Response Time	8ms
	Display Area (mm)	1895.04x1065.96mm
	Panel Size (mm)	1922.2x1093.2x16.14mm
	Screen Weight	35.8Kg
Lamp Type	WLED	
INTERNAL MEDIA PLAYER	CPU	Rk3399, Dual-core Cortex-A72, 1.8GHz
	GPU	ARM Mali-T864
	RAM	2/4 GB DDR3
	ROM	8/16 GB Flash
	OS	Android 9.0
CONNECTOR	USB 2.0	X2
	HDMI (Output)	X1
	SD	X1
	Rj45	X1
	4G SIM (Optional)	X1
CONNECTIVITY	LAN	RJ45 Port, 10/100M Ethernet
	WiFi	Built-in WiFi 802.11a/b/g/n/ac
	4G (Optional)	LTE
FILE SUPPORT	Video	H.264, MKV, WMV9, MPEG 1/2/4, HD Divx, Xvid, RM/RMVB;
	Image	BMP/PNG/GIF/JPEG
	Audio	MP3,WMA,WAV,EAAC+, MP2 dec, Vorbis (Ogg), AC3, FLAC, APE, BSAC
	Scrolling Text	txt
DISPLAY MODE		Landscape
TOUCH		Capacitive touch options

HDMI DISPLAY	Output Mode	HDMI 480P	HDMI 576P
		HDMI 720P 50Hz	HDMI 720P 60Hz
		HDMI 1080I 50Hz	HDMI 1080I 60Hz
		HDMI 1080P 24Hz	HDMI 1080P 50Hz
		HDMI 1080P 60Hz	
PERATURE CONTROLLER		TemCooling fan can be set to start running when the whole temperature reached 60 °C	
SPD		Lightning protection device	
LEAKAGE PROTECTION SWITCH		110~220V*1	
COOLING SYSTEM	Blowing machine Cooling fan Noise DB (A)	Air cooling system: 45 blowing machines and 15 cooling fans, stable and reliable performance <55dB	
LEVEL OF PROTECTION		IP65	
ON-SCREEN DISPLAY LANGUAGES		English, French, German, Italian, Polish, Russian, Simplified Chinese, Spanish, Turkish, Arabic, Japanese, Traditional Chinese etc.	
POWER	Mains Power Consumption	AC 100-240V, 50-60 Hz	
		680W	
SOUND	Built-in Speakers	2 x 10W	
DIMENSION & WEIGHT	Machine Size	2800x220x1390mm	
		1550X50X620mm(stand base)	
	Machine Weight	155KG / 21KG(stand base)	
	Carton Size	3200x320x1500mm	
	Carton Weight	180KG	
	Wooden case Size Wooden case Weight	3300x380x1580mm(1PCS) 208KG	
OTHER	Regulatory Approvals Warranty	CE, FCC, ROHS	
		1 year warranty	
ACCESSORIES	Included	Remote Control, Power supply, User manual, Keys, Screws	