In-Window High Brightness for Direct Sunlight

Outstanding Brightness with Quiet Operation

The SVFSHD490 display is designed for installation in retail stores, restaurants, or window-facing locations, delivering high-brightness performance to capture attention even in daylight.

With low power consumption and silent fans for minimal noise, it offers exceptional energy efficiency.

Key Features

- 49" Display

- Ultra - High Brightness
  1500- 5000cd/m2

  Standard Brightness
  2500 cd/m2

- 1920 x 1080 (FHD)

- Panel Size
  1114 x 644 x 85.5mm

- 24/7 Commercial Grade

- External Light Sensor

- Landscape or Portrait Orientation

SUREVIEW

PANEL

Screen Size	49"
Panel Technology	IPS
Aspect Ratio	16:9
Native Resolution	1,920 x 1,080 (FHD)
Brightness	2,500cd/m² (Typ.), Customized 1500~5000cd/m²
Contrast Ratio	1,000:1
Dynamic CR	500,000:1
Viewing Angle (H x V)	178 x 178
Surface Treatment	N/A
Orientation	Landscape & Portrait

CONNECTIVITY

Input	HDMI, USB, VGA
Output	N/A
External Control	IR Receiver, Auto-Dimming Sensor

PHYSICAL SPECIFICATION

Bezel Colour	Black
Bezel Width	18mm (T/B/L/R)
Monitor Dimension (W x H x D)	1114 x 644 x 85.5 mm
Weight (Head)	25 KG
Carton Dimension (W x H x D)	TBD
Packed Weight	TBD
VESA™ Standard Mount Interface	400 x 400 mm
Special Features	Temperature Sensor, Auto Brightness Sensor, Silent Fans Cooling, Source Selection, Brightness/Contrast/Backlight Select Energy Saving, Smart Energy Saving

ENVIRONMENT CONDITIONS

Operation Temperature Range	0°C to 45°C (w/o Direct sunlight), 0°C to 35°C (Direct sunlight)
Operation Humidity Range	10% to 80%

POWER

Power Supply	100 - 240 V ~, 50/60 Hz
Power Type	Built-In Power
Power Consumption	Typ. 130W, Max. 143W

STANDARD (CERTIFICATION)

Safety	N / A
EMC	CE

ACCESSORIES

Included Accessories	Remote Control (w/o battery), AC Power Plug
Optional Accessories	N/A

HARDWARE

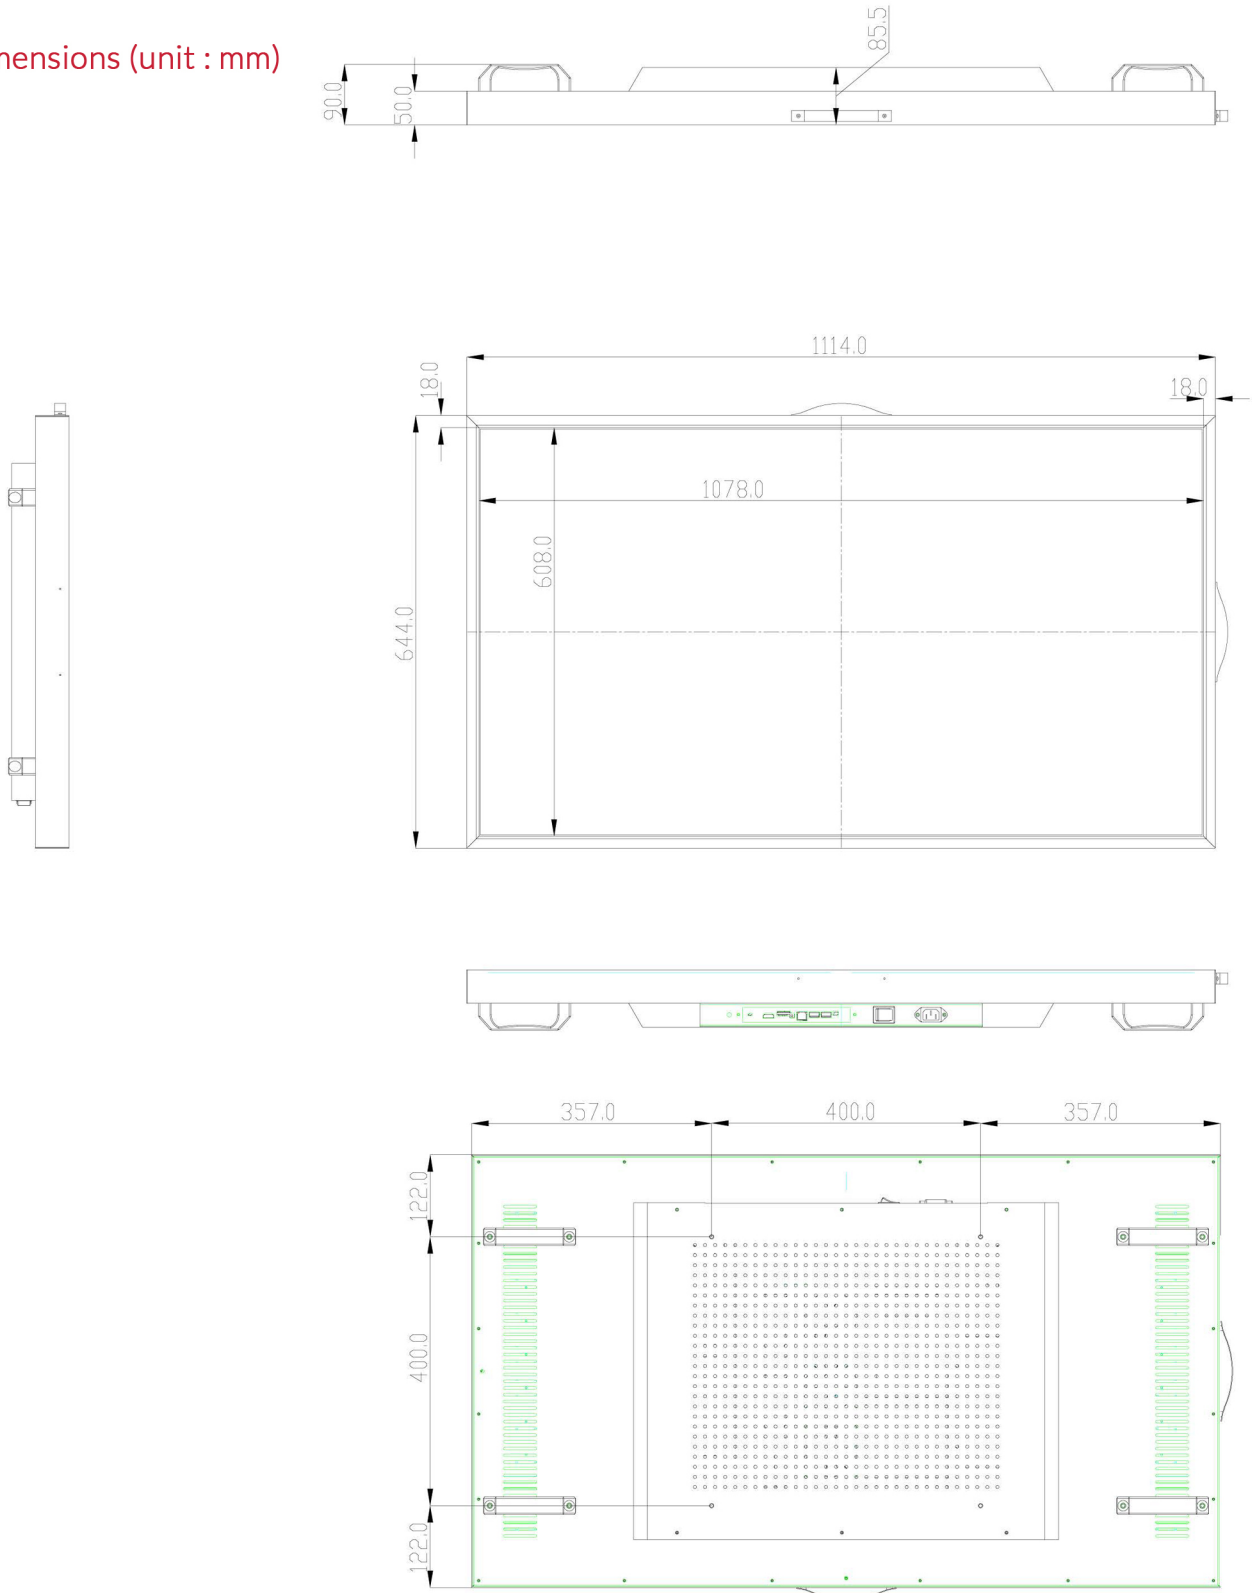|	
Android Board	Huidu 3568s Android Board
CPU	RK3568, Quad-Core, Up to 2.0 Ghz
Internal Storage	Standard 2GB, Optional 4GB
Memory	EMMC FLASH 16GB

SOFTWARE

Operating System	Android 11.0

Dimensions (unit : mm)

85.5

90.0

50.0

1114.0

18.0

18.0

1078.0

608.0

644.0

357.0

400.0

357.0

122.0

400.0

122.0

SUREVIEW