## In-Window High Brightness for Direct Sunlight

**Outstanding Brightness with Quiet Operation**

The SVFSHD550 display is designed for installation in retail stores, restaurants, or window-facing locations, delivering high-brightness performance to capture attention even in daylight.

With low power consumption and silent fans for minimal noise, it offers exceptional energy efficiency.

### Key Features

- 55" Display

- Ultra - High Brightness
  1500- 5000cd/m2

  Standard Brightness
  2500 cd/m2

- 1920 x 1080 (FHD)

- Panel Size
  1249.6 x 720 x 85mm

- 24/7 Commercial Grade

- External Light Sensor

- Landscape or Portrait Orientation



**SUREVIEW**

## PANEL

| | |
|---|---|
| Screen Size | 55" (54.64" measured diagonally) |
| Panel Technology | IPS |
| Aspect Ratio | 16:9 |
| Native Resolution | 1,920 x 1,080 (FHD) |
| Brightness | 2,500cd/m² (Typ.), Customized 1500~5000cd/m² |
| Contrast Ratio | 1,000:1 |
| Dynamic CR | 500,000:1 |
| Viewing Angle (H x V) | 178 x 178 |
| Surface Treatment | N/A |
| Orientation | Landscape & Portrait |

## CONNECTIVITY

| | |
|---|---|
| Input | HDMI, USB, VGA |
| Output | N/A |
| External Control | IR Receiver, Auto-Dimming Sensor |

## PHYSICAL SPECIFICATION

| | |
|---|---|
| Bezel Colour | Black |
| Bezel Width | 18mm (T/B/L/R) |
| Monitor Dimension (W x H x D) | 1250 x 721 x 80mm |
| Weight (Head) | 33 KG |
| Carton Dimension (W x H x D) | TBD |
| Packed Weight | TBD |
| VESA™ Standard Mount Interface | 400 x 400 mm |
| Special Features | Temperature Sensor, Auto Brightness Sensor, Silent Fans Cooling, Source Selection, Brightness/Contrast/Backlight Select Energy Saving, Smart Energy Saving |

**ASSURED** ◢
DIGITAL SIGNAGE

**SVFSHD550**

## ENVIRONMENT CONDITIONS

| | |
|---|---|
| Operation Temperature Range | 0°C to 45°C (w/o Direct sunlight), 0°C to 35°C (Direct sunlight) |
| Operation Humidity Range | 10% to 80% |

## POWER

| | |
|---|---|
| Power Supply | 100 - 240 V ~, 50/60 Hz |
| Power Type | Built-In Power |
| Power Consumption | Typ. 330W, Max. 330W |

## STANDARD (CERTIFICATION)

| | |
|---|---|
| Safety | N / A |
| EMC | CE |

## ACCESSORIES

| | |
|---|---|
| Included Accessories | Remote Control (w/o battery), AC Power Plug |
| Optional Accessories | N/A |

## HARDWARE

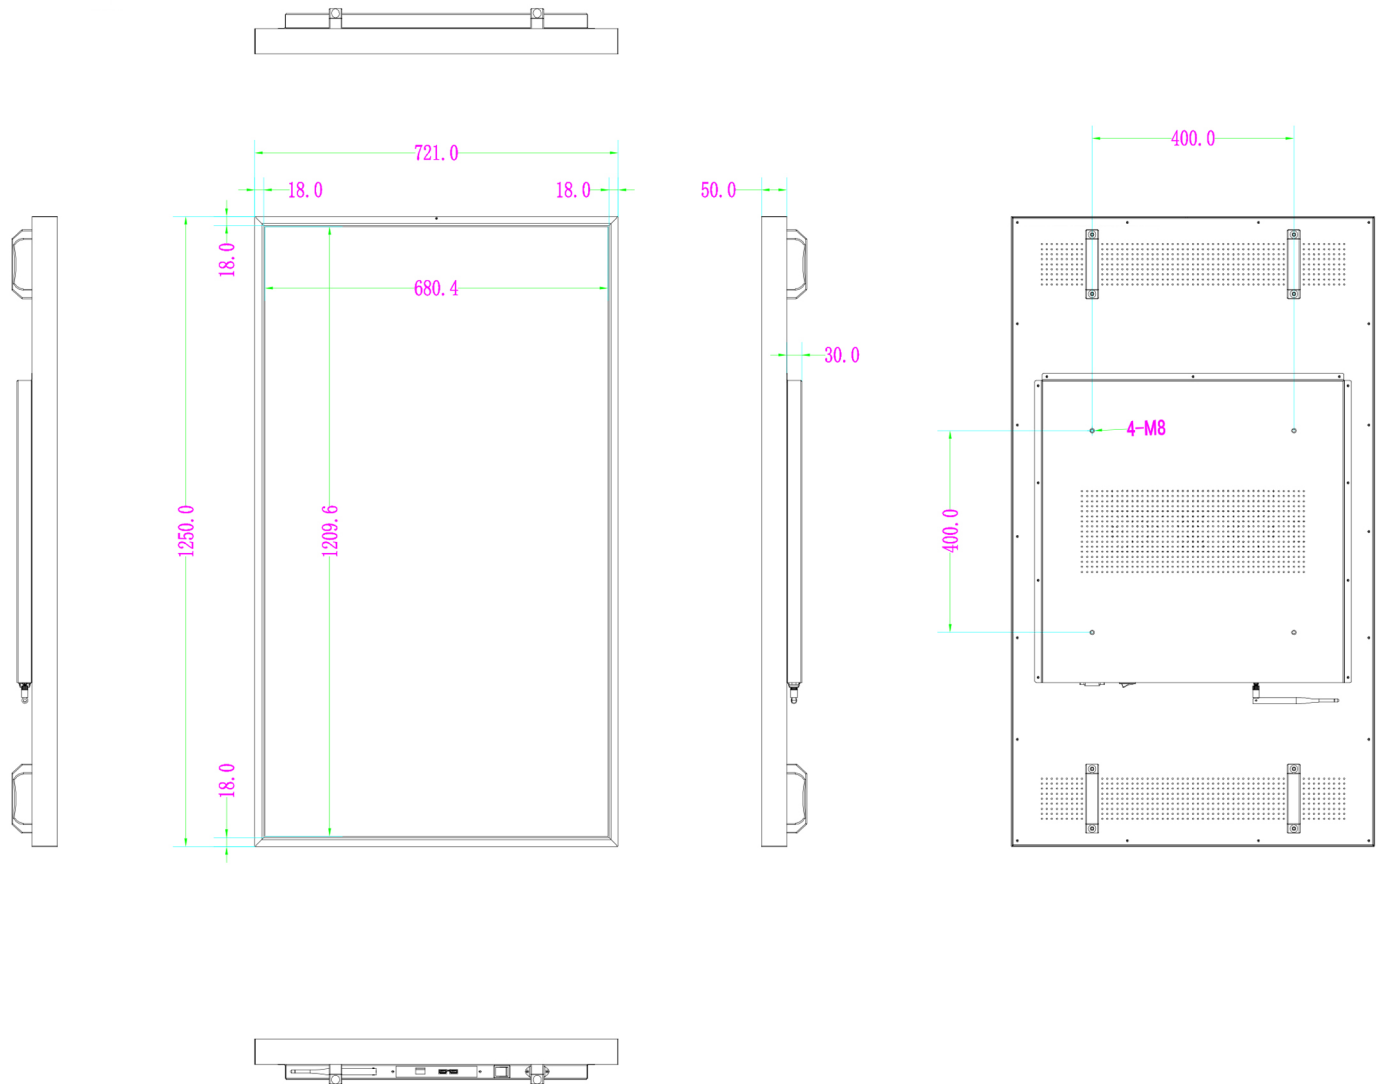| | |
|---|---|
| Android Board | Huidu 3568s Android Board |
| CPU | RK3568, Quad-Core, Up to 2.0 Ghz |
| Internal Storage | Standard 2GB, Optional 4GB |
| Memory | EMMC FLASH 16GB |

## SOFTWARE

| | |
|---|---|
| Operating System | Android 11.0 |

## Dimensions (unit : mm)

721.0
18.0
18.0
50.0
18.0
680.4
30.0
400.0
1250.0
1209.6
4-M8
400.0
18.0

**SUREVIEW**