


SVFSHD650



Outstanding Brightness with Quiet Operation

The SVFSHD650 display is designed for installation in retail stores, restaurants, or window-facing locations, delivering high-brightness performance to capture attention even in daylight.

With low power consumption and silent fans for minimal noise, it offers exceptional energy efficiency.

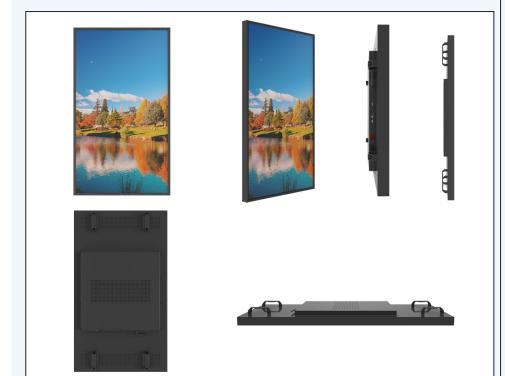

Key Features

- 65" Display
- Ultra High Brightness 1500- 5000cd/m2

Standard Brightness 2500 cd/m2

- 3840 x 2160 (UHD)
- Panel Size 1468.6 x 843.6 x 85.3mm
- 24/7 Commercial Grade
- External Light Sensor
- Landscape or Portrait
 Orientation



65" High-Brightness In-Window Display

SVFSHD650

PANEL						
Screen Size	65" (64.53" measured diagonally)					
Panel Technology	IPS, RGBW					
Aspect Ratio	16:9					
Native Resolution	3840 x 2160 (UHD)					
Brightness	2,500cd/m² (Typ.), Customized 1500~5000cd/m²					
Contrast Ratio	1,100:1					
Dynamic CR	500,000:1					
Viewing Angle (H x V)	178 x 178					
Surface Treatment	N/A					
Orientation	Landscape & Portrait					
CONNECTIVITY						
Input	HDMI					
Output	N/A					
External Control	IR Receiver, Auto-Dimming Sensor					
PHYSICAL SPECIFICATION						
Bezel Colour	Black					
Bezel Width	18mm (T/B/L/R)					
Monitor Dimension $(W \times H \times D)$	1468.6 x 843.6 x 85.3mm					
Weight (Head)	40 KG					
Carton Dimension (W x H x D)	TBD					
Packed Weight	TBD					
VESA™ Standard Mount Interface	400 x 400 mm					
Special Features	Temperature Sensor, Auto Brightness Sensor, Silent Fans Cooling, Source Selection, Brightness/Contrast/Backlight Select Energy Saving, Smart Energy Saving					

www.assured-signage.com



65" High-Brightness In-Window Display

SVFSHD650

FNV	IRONN	1FNT	COND	TIONS
			\sim	

Operation Temperature Range

0°C to 45°C (w/o Direct sunlight), 0°C to 35°C (Direct sunlight)

Operation

10% to 80% **Humidity Range**

POWER

100 - 240 V ~, 50/60 Hz Power Supply

Built-In Power Power Type

Power Consumption Typ. 400W, Max. 450W

STANDARD (CERTIFICATION)

N/A Safety

EMC CE

ACCESSORIES

Included Accessories Remote Control (w/o battery), AC Power Plug

Optional Accessories Mounting Brackets (Wall Mount, Roof Hanging, Floor Stand)

HARDWARE

Huidu 3568s Android Board Android Board

CPU RK3568, Quad-Core, Up to 2.0 Ghz

Internal Storage Standard 2GB, Optional 4GB

EMMC FLASH 16GB Memory

SOFTWARE

Android 11.0 **Operating System**



SVFSHD650

