


# Datasheet for APPC-Series

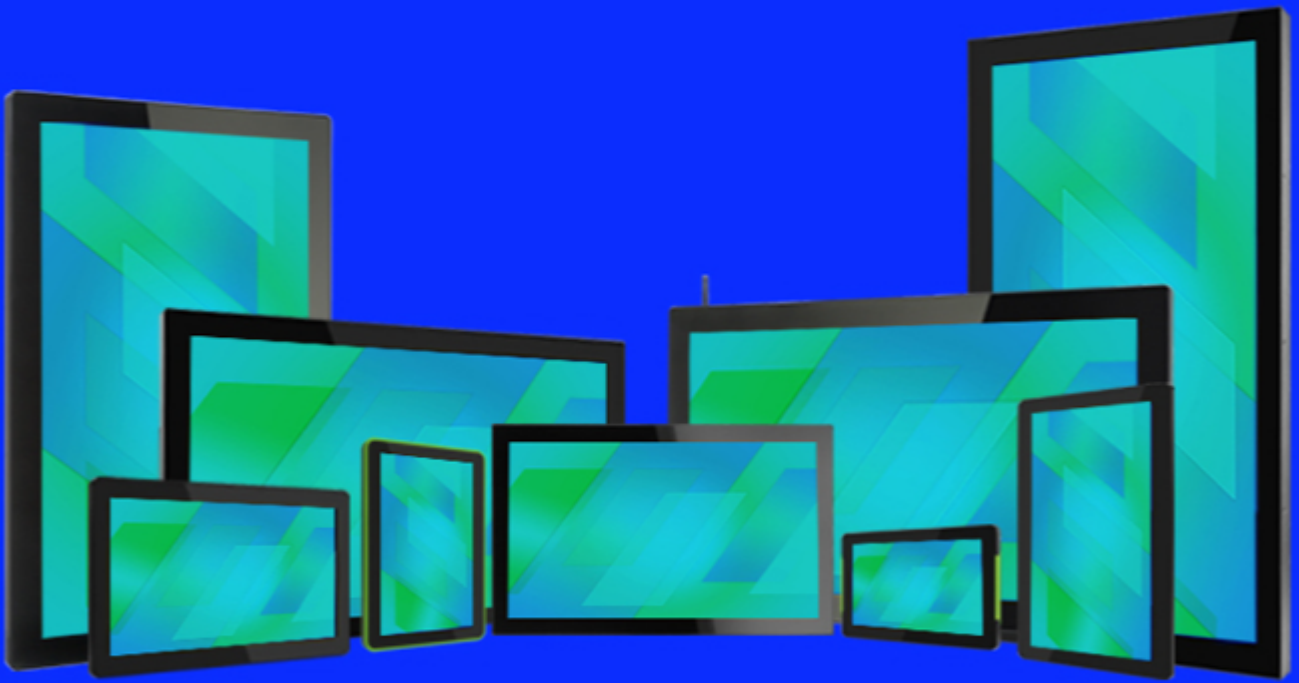

**PRO DVX** | ALWAYS

**ProDVX Europe B.V.**

Europalaan 10  
5232 BC, Den Bosch  
The Netherlands

+31 (0)73 737 0345  
sales@prodvx.com

# Android Panel PCs

## APPC-10XPLNW-R23

### Panel

<b>Size</b>	10.1"
<b>Resolution</b>	1280 x 800
<b>Brightness</b>	500 cd/m2
<b>Viewing Angle</b>	H 160° / V 160°
<b>Treatment</b>	Anti-glare
<b>Touch Type</b>	10 point touch projected capacitive
<b>Contrast Ratio</b>	800 : 1
<b>Haze</b>	2~8%
<b>Aspect Ratio</b>	16:10 wide

### Physical

<b>Housing</b>	ABS+PC (Macrolon)
<b>Color</b>	White
<b>Weight</b>	650 g
<b>Dimensions</b>	255,3 x 181 x 26,7 mm
<b>Mounting / VESA</b>	VESA 75
<b>Power Supply</b>	12 V / 2 A (EU, UK, US)
<b>Power Supply included?</b>	No
<b>Power Usage</b>	10 ~ 20 Watt

### System

<b>CPU</b>	RK3568
<b>GPU</b>	Mali-G52
<b>System Memory</b>	4 GB DDR4 SDRAM
<b>Internal Storage</b>	16 GB eMMC Flash
<b>OS</b>	Android 12
<b>Network LAN RJ45</b>	10/100/1000 Mbps LAN
<b>Power over Ethernet (PoE)</b>	IEEE 802.3at (PoE+)
<b>WiFi</b>	802.11 a/b/g/n/ac
<b>Bluetooth</b>	BT 5.0
<b>Storage / Working Humidity</b>	10 ~ 90 % non-condensing
<b>Storage Temp</b>	-10 ~ 55 degrees C
<b>Working Temp</b>	0 ~ 40 degrees C

### Other

<b>I/O Ports</b>	12 V DC-IN, 3.5 mm audio-out, USB 2.0, RJ45, GPIO, Micro-USB, 3x Pogo pin, HDMI out
<b>Microphone</b>	YES
<b>Speakers</b>	2 x 2 W
<b>LED Light Bar</b>	2 sided LED bar (RGB)
<b>Integrated NFC</b>	Integrated NFC reader (NXP PN553)
<b>Camera</b>	Optional accessory
<b>Safety features</b>	IEEE 802.1X PEAP/TLS/TTLS support on LAN and WiFi, Cable lock on power cable, Flushmount for safe installations
<b>Standard Warranty</b>	3 years

